


Complete system with screw conveyors.

Double $\varnothing 300\text{mm}$.

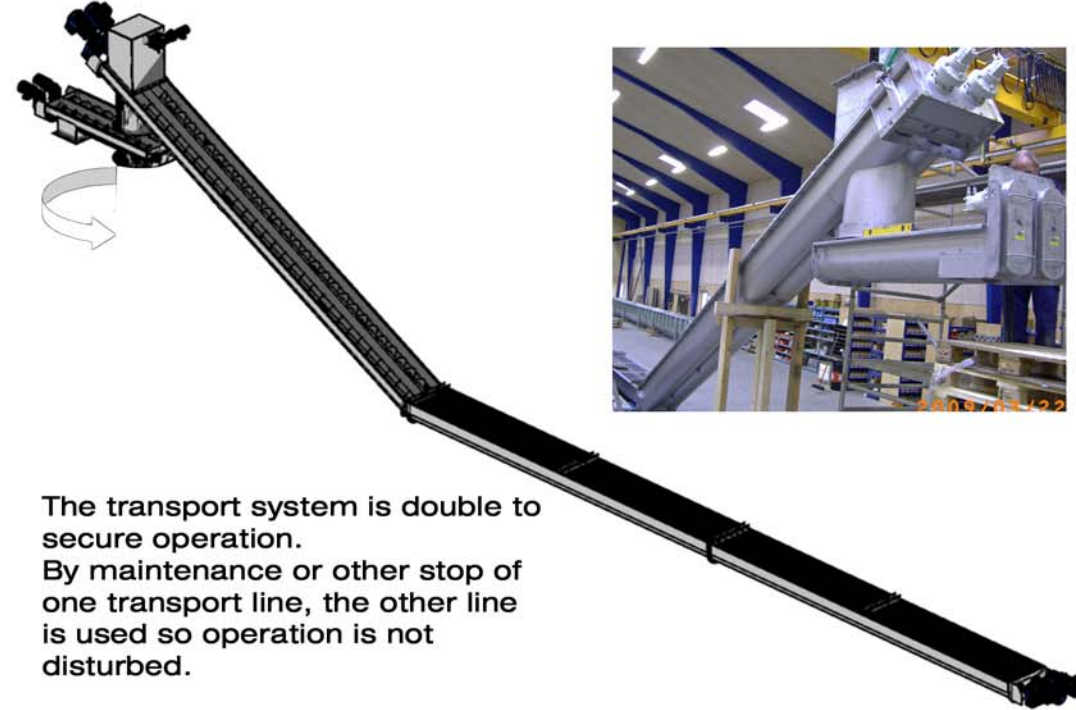

The transport system is double to secure operation. By maintenance or other stop of one transport line, the other line is used so operation is not disturbed.

The last screw conveyor is mounted on a turning device. The outlet of the screw can hereby move from one side to the other.

The casing is produced in acid proof AISI 316, screw rotors in wear proof HARDOX 400. Mounted with hydraulic motor.

Complete delivery from BEMA including engineering, production and final test.

The delivery meets high demands of quality and documentation.



View products and examples at:

www.bema.as


Production of screwrotors:



BEMA is subsupplier of screwrotors, and offers production of screwrotors by customer drawing or in cooperation with our sales department.



Production of screwflights:

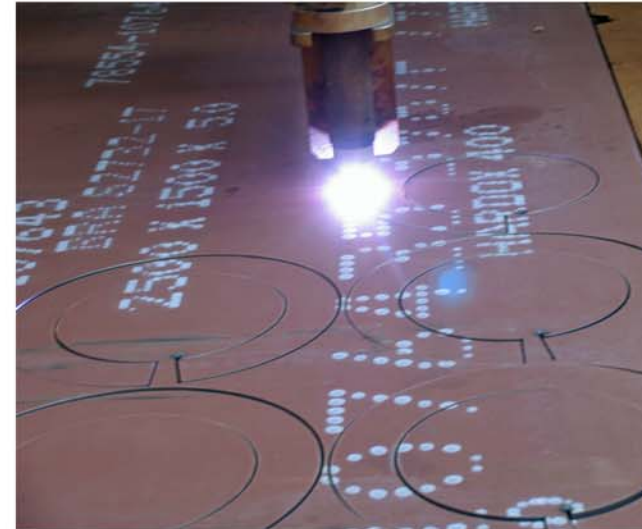

Delivery time:
Typical 1-2 weeks.

Specialists in
HARDOX wearplate

By order
/ Inquiry

State:

- Outer diameter
- Inner diameter
- Pitch
- Thickness
- Material
- Number of flights

All Screwflights are **pressed cold** to maintain the strenght of the steel and prevent damage of the surface.

